

JADS[®] SERIES

All Electric Servo Drive
Injection Molding Machine

J550ADS

J650ADS

J850ADS

J850ADSW



Made in HIROSHIMA

JSW



JQA-QMA13993


JQA-EM6416 (Hiroshima Plant)

**Electric servo drive injection molding machine
that has evolved to a higher standard than ever before**

JADS[®] **SERIES**

JSW, a specialist in toggle type mold clamping unit design,
proudly presents the JADS series of electric servo drive injection molding machines.
As a world's top-class supplier we have achieved
“faster cycle times”, a stronger, “long life design” and “precise & stable molding”
based on our extensive experience.

In addition, the new controller, which is based on ergonomics
and is extremely easy to use,
provides advanced intelligence to meet the diverse needs of various molding factories
and contributes to increased productivity.

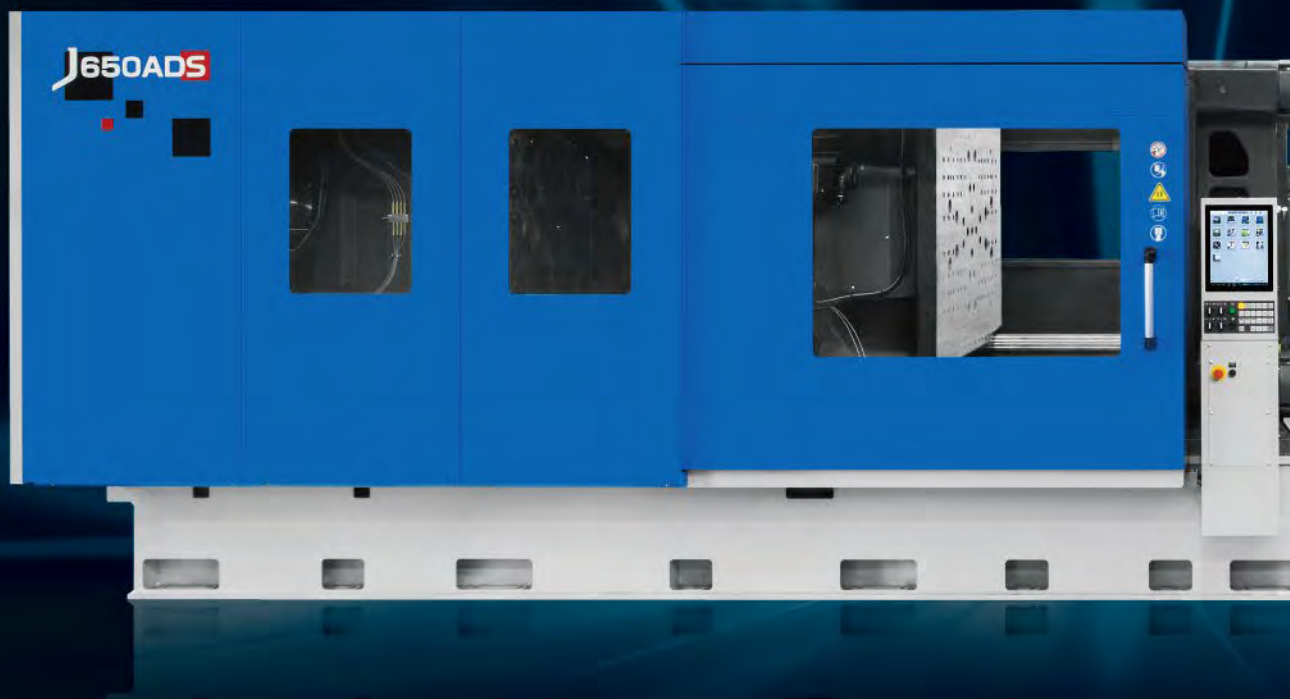

4 Solutions for High Productivity

S*PEED*

Faster Cycle Times

- Ultrahigh-speed open/close toggle mechanism
- High-speed & high-acceleration ejector
- High speed servo type mold height adjustment device
- High response & high output injection unit

S*MART*

Intelligence

- Applications for a variety of needs
- New controller “SYSCOM 5000i”
- Convenient screen layout
- IoT solutions “J-WiSe®”

S*TRONG*

Longer Life Design

- High-rigidity mold clamping unit
- Flat press wide platen
- Advanced high-performance screw

S*TABLE*

Stable Molding

- Clamping force feedback control
- High-accuracy recovery control
- Energy saving




Exceptional dry cycle capability


Ultra high-speed toggle mechanism

JSW's original toggle clamp design has evolved to achieve top-level dry cycle times.

- Mold open/close speed is increased by approximately 15%
- High-speed, high-acceleration ejector device significantly reduces product removal time
- The servo drive mold thickness adjustment mechanism greatly reduces the time for the mold thickness adjustment and improves the linearity of clamping force between the set value and actual value

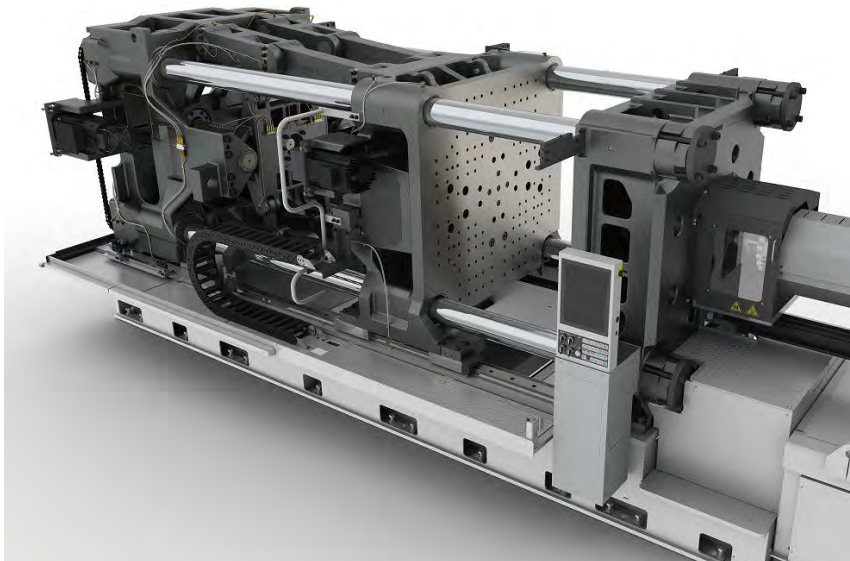

■ Comparison of dry cycles (650T)

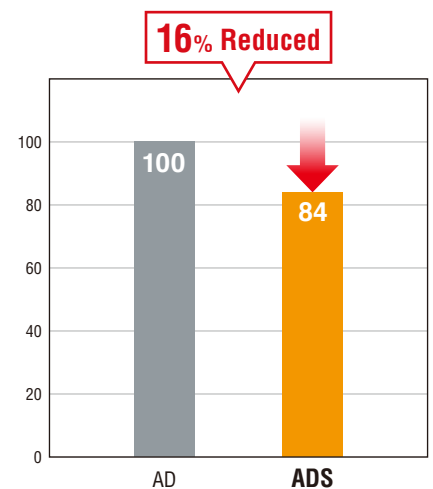

Improved stability of injection and plasticizing


Highly responsive & high-power injection unit

JSW's original high-precision, highly stable injection unit has been made more compact with reduced inertia allowing for consistent injection and plasticizing.

- Injection acceleration time has been increased by 27% to enable molding of thin-walled products
- The three-plate structure of the injection unit achieves high rigidity and high durability
- Large-capacity servo motors are installed to support a wide range of molding applications such as high speed and high load processes



■ Injection start-up time (3900H)


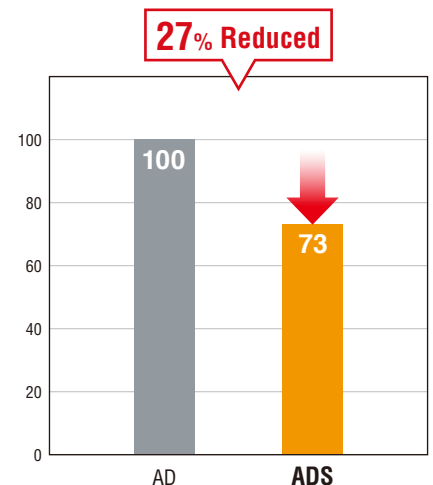


Mold clamping unit with a proven track record and high reputation

High-rigidity mold clamping unit

Further evolution of the proven highly rigid mold clamping unit to achieve more stable molding.

- High-rigidity mold clamping unit that pursues precise, stable molding and high-durability
- Maintenance-free, linear-guided mold support system with high running accuracy
- Flat press platens ensure uniform surface pressure distribution and prevent burr and uneven wall thickness in molded products
- The mold open/close motor is equipped with a brake as standard to protect the mold in case of power failure or other unforeseen circumstances

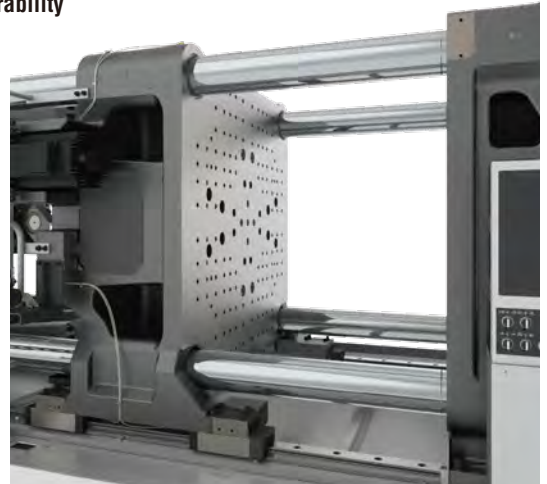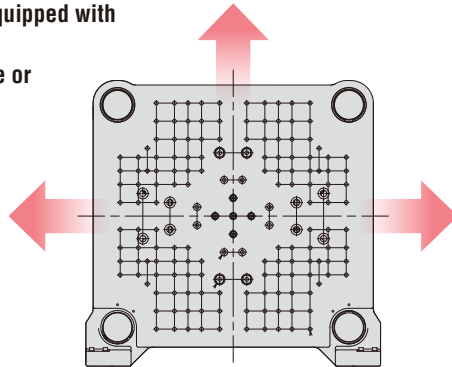

Wide platens with high rigidity

By increasing the distance between tie bars while maintaining the rigidity of the mold platen, larger molds can be mounted.

Item	Series	Model	J550	J650	J850	J850W
Distance between Tie-bars H×V (mm)	AD		960 × 900	1060 × 960	1060 × 1060	1320 × 1320
	ADS		1020 × 970	1120 × 1070	1120 × 1070	1370 × 1320

Advanced high-performance screw

*Standard screw for 1400H and smaller is the GP screw


M3-CL screw

Faster cycle times and a stable molding process is achieved utilizing a longer life screw with both high plasticizing capacity and high kneading performance.


- Achieves faster cycle molding with the industry's top-class plasticization capacity
- New screw design reduces wear and material burn
- JSW's original screw design provides both high plasticizing capacity and improved kneading performance



Conventional screw

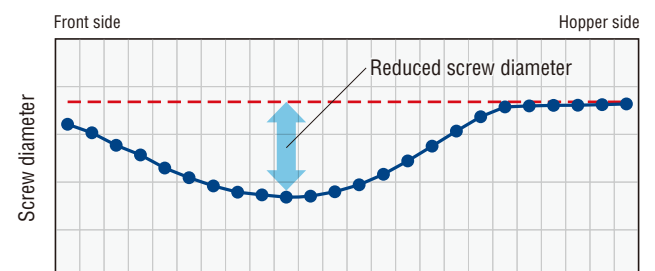

M3-CL screw


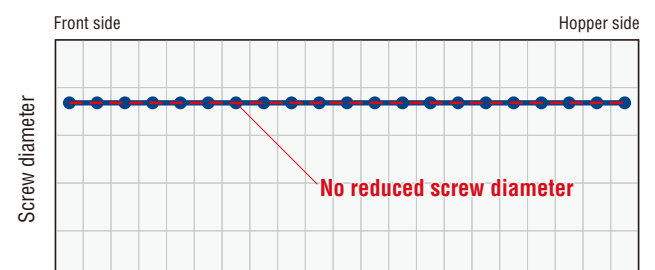


Highly precise and stable control


Original high precision mold clamping control

Prevents changes in mold clamping force due to changes in temperature to achieve stable molding.

- “Visualization” of the actual clamping force in toggle machine
- Reduced clamping force fluctuations based on temperature changes in the mold
- “Reduction of mold maintenance” by stabilizing gas venting
- “Longer mold life” with optimum clamping force

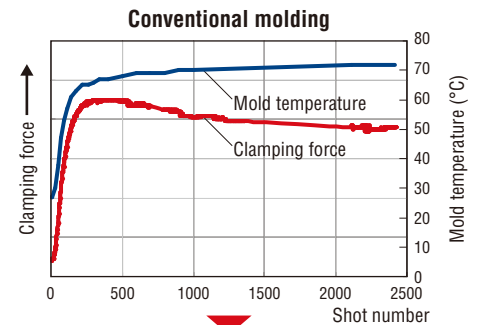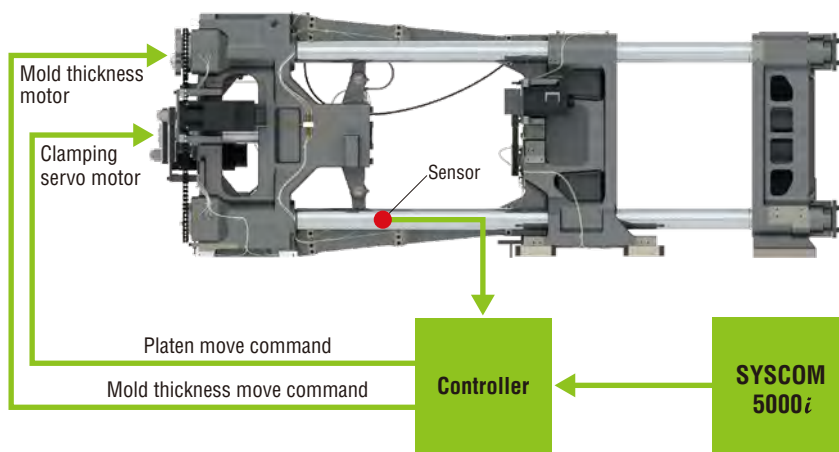

Mold clamping force changes as mold temperature rises

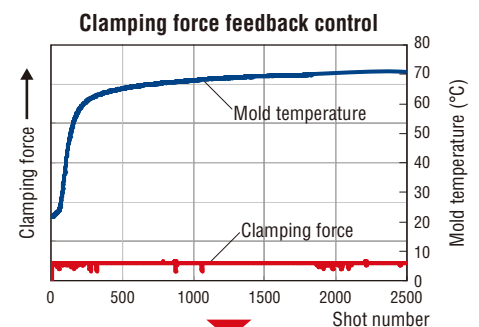

Mold clamping force remains constant even if the mold temperature changes


New mold protection function

In addition to conventional mold protection, the use of the new control further improves mold protection performance.

- High safety performance with easy setup
- Compatible with various molds
- Follows changes in mold temperature
- Abnormality detection at all stages of mold open/close

Only two values need to be set

- Mold protection monitoring sensitivity
 - Changeover position
- Easy to set !

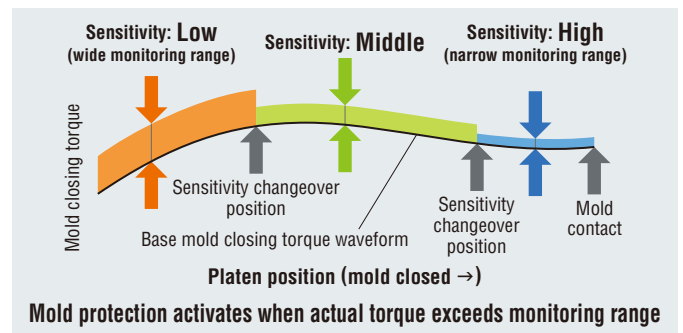

High-precision original injection control

Various holding pressure settings

By selecting the proper holding pressure mode, the quality of the molded products can be improved and stabilized.

Select mode	Control	Improvements
IVSH	Changeover by Position	—
IVSL	Changeover by Speed	Less variation when filling
IPS	Changeover by Pressure	Less variation when filling
EXT	Changeover by External signal	Pressure within the mold can be controlled (selected) by user
Wait control 1	Constant control of the Cushion position	Flow extension, improvements in filling balance, pressure reduction in the mold, etc.
Wait control 2	Constant control of the Cushion position + Pressure holding	Flow extension, improvements in filling balance, pressure reduction in the mold, controlling sink marks, etc.

High-accuracy recovery control

JSW's original high accuracy volume control

JSW's unique High Accuracy volume Technology enables further stabilization of molding.

Reverse Seal Control

The screw is reversed after recovery ends to help the back-flow prevention ring close and to inhibit drooling.


Injection Weight and Cushion Stability

In order to stabilize product weight, the density of molten resin is controlled after recovery.


High Accuracy Volume Control

In order to stabilize product weight, the reverse seal and injection stroke after repressurization are constantly controlled.

Before reversal

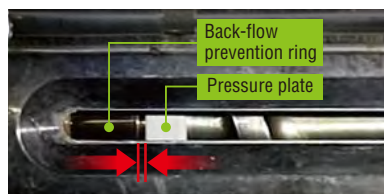


After reversal

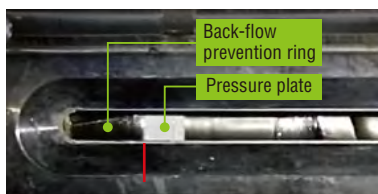

Promotes closure of the back-flow prevention ring after reversal

Product weight variation

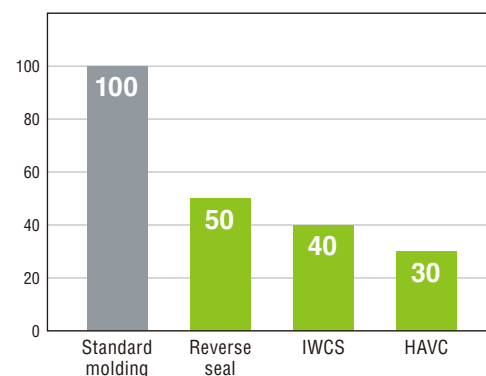


Various energy saving solutions


Original Power Regeneration

In the entire process of servo motor drive, such as injection and mold open/close, the energy generated at the time of deceleration is recovered as regenerative power to reduce power consumption.


Regenerated power in the mold open/close

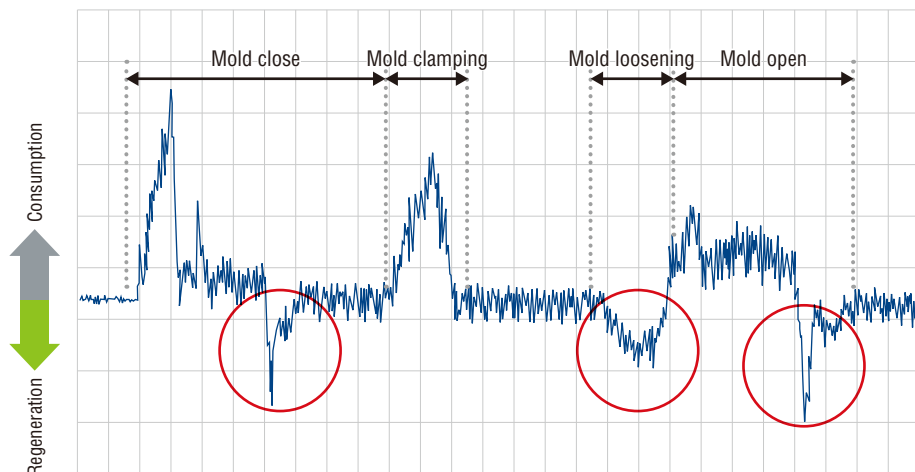

Regenerated power in the mold open/close

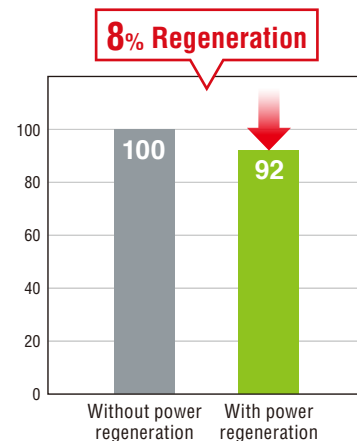

Comparison of electricity consumption (3100H)

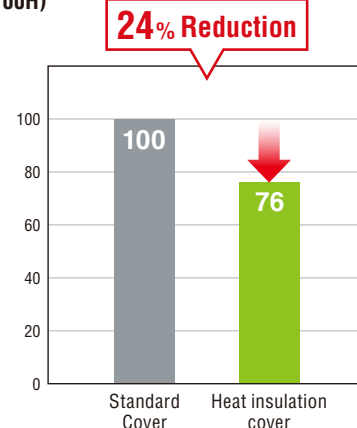

Barrel insulation cover (optional)

- Prevents heat dissipation from the barrel heater and improves the thermal efficiency of the heater
- Reduces power consumption by about 24% when the barrel temperature rises

Synchro heat up control

- Reduces power consumption by synchronizing the temperature rise speed of the nozzle and barrel
- Prevents resin burn and contamination at the nozzle when the barrel temperature rises


*Power consumption when the barrel temperature is increased from 150°C to 250°C

Management

Promotes energy savings and improves productivity with production management system

Energy savings [J-Support]

SYSCOM 5000i will suggest injection molding conditions in order to save energy

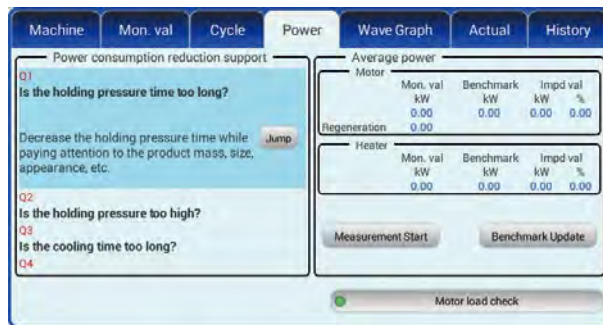

Production management system


Collecting of shot data and statistical data, setting of upper and lower limit alarms can be controlled easily.

Manufacturing

Reduces operator work load to create higher added value


Molding assist [J-Assist]

The dialog wizard covers processes from mounting the mold, setting initial conditions, to defect countermeasures.

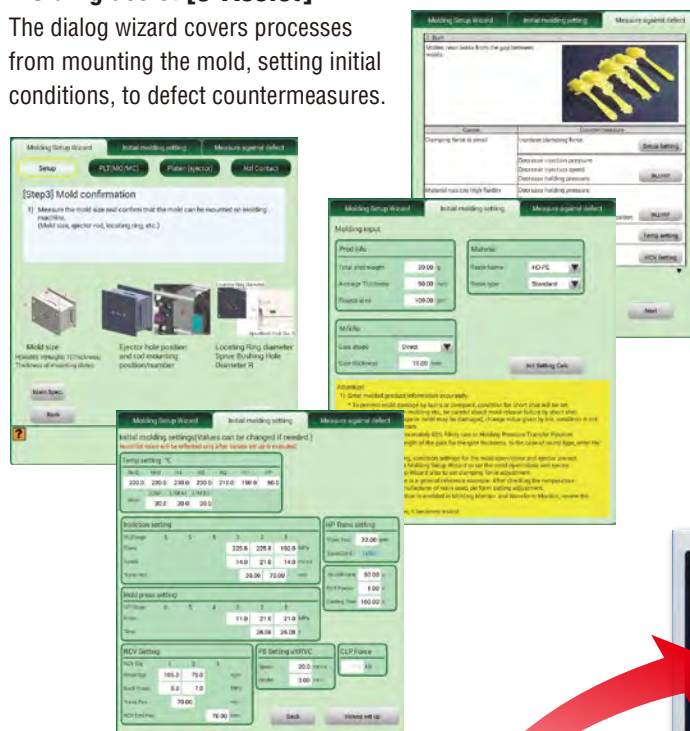

Memo of molding conditions

Storage capabilities such as molding conditions, memos, setting of peripheral devices and photos of products.


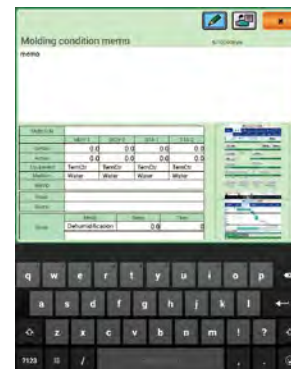


Screen shots - Hand written memos

You can write and edit information directly on top of screenshots.

Instruction manual stored in system

Instruction manual can be referred to as needed on the controller.

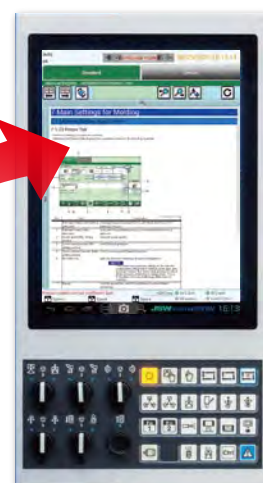

Maintenance

Preventive maintenance reduces machine downtime

Preventative maintenance [J-Support]

Maintenance items can be checked in collective display



Main Spec	Inspection	Board Status	Servo Status	I/O Check	Calibration	ServoControl Monitor
Maintenance	Preventive Maintenance	Monthly	Quarterly	Semi-Annual	Annual	History menu
Guarantee STD						
Change Job						
Startup Inspection						
Fan	Back Flow Prevention ring					
Discharge Mode						
Screen Replace						
Battery Replacement						
Display CPU battery	Control CPU battery	Battery	Capacitor	Resistor delay	Elapsed delay	Elapsed delay
Time to replace: 27min	Time to replace: 37min	Time to replace: 27min	Time to replace: 37min			

Automatically notifies you when to perform regular inspections.
Inspection record can be stored in the controller.

Quarterly	Up to past 3
Smb1	ChkPoint
Q-1	Ball screw
Q-2	Servomotor cooling fan
Q-3	Control Panel Cooling Fan
Q-4	Inspection of Mold Thickness Adjustment
Q-5	Band heater
Q-6	Thermocouple




The inspection timing of the ball screws can be checked while taking the molding load into account.

Production engineering

Enables the construction of a manufacturing system through connection with peripheral equipment.

I/O customization

Simple sequences can be user generated.

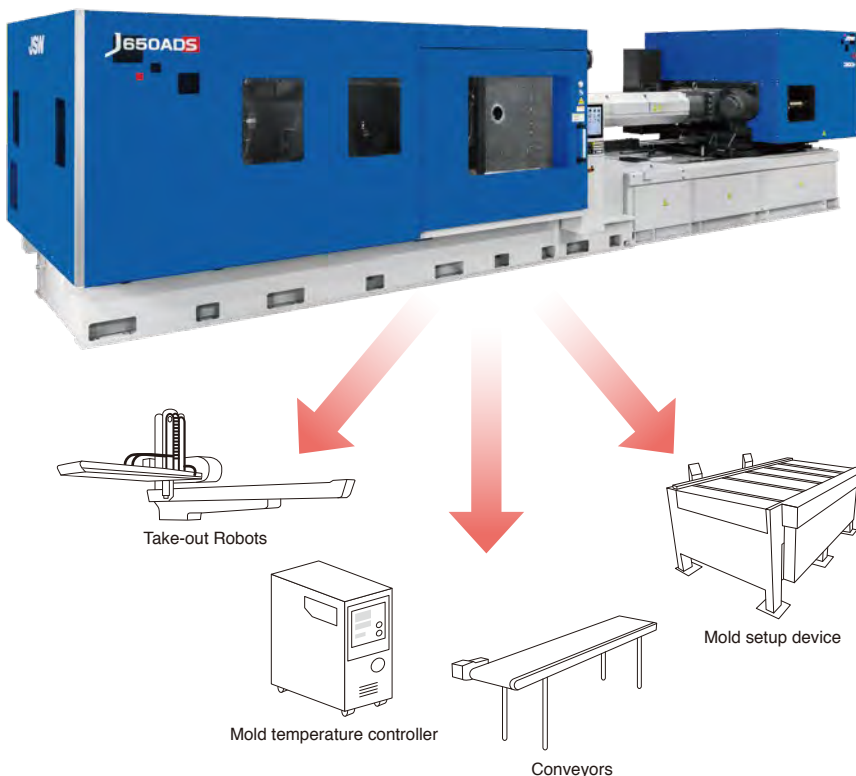

Setting

Matrix	Matrix2	Matrix3	Matrix4	Matrix5
Address	Input signal	1	2	3
1	YLV2	Mold open end		
2	CSRLV2	Internal relay 0 output		
3	YOMCL	Mold closing		
4				
5				
6				
7				
8				
9				
10				
Address	Output signal	1	2	3
1	CSRLV1	Internal relay 1 output		
2	CS03	Mold close interlock		
3	CSAX1	SINK1 TBI 03-04 pin		
4				
5				
Pulse	Pulse Signal	Reset	Reset Signal	Set Val
CN01				
CN02				
CN03				
CN04				
CN05				
Counter1	Counter2	Counter3	Counter4	Counter5

Action

- 1 Mold is opened
- 2 Product take out instructions given to the robot
- 3 Pulse signal indicating product take out completion is received from the robot
- 4 Clamping begins & Auxiliary equipment operates in 3 seconds

New controller **SYSCOM5000i**


Function fully realized through simple navigation system

Main characteristics of SYSCOM5000i

- Casual multi-touch operation
- Simple lever operation
- User-manual display function
- On screen instruction manual
- Large 15" display with utilized energy saving LED technology



Touch operated lever switches



Tablet based operation (optional)



User friendly screen configuration

Operation process display

Visual or list display for every molding process.



Collective setting display

Molding conditions can be set without navigating numerous pages.



Cycle monitor

Allows task conditions in the molding machine to be visually checked in real time.

Machine	Mon.val	Cycle	Power	Wave Graph	Actual	History
Start	Current	Last Time				
M/C	0.00	0.00 / 0.00				
M/L	3.80	0.00 / 0.00				
W.P.	0.00	0.00 / 0.00				
Rcv	4.84	0.00 / 0.00				
Cool	4.31	0.00 / 0.00				
M/O	7.17	0.00 / 0.00				
Ejection	8.95	0.00 / 0.00				
Interval	8.93	0.00 / 0.00				
Cycle	0.00	0.00 / 0.00				

Multiple injection (option)


Multiple injection unit control can be integrated.



IoT solutions **J-WiSe[®]**


J-WiSe[®] : JSW Worldwide IoT Solutions of Enhancement

“J-WiSe[®]” is a general term for the IoT solutions that JSW aims to provide. By providing systems and services in the four categories of “Production Management,” “Operation Support,” “Service and Maintenance,” and “Production Automation Systems,” our goal is to make our customers’ molding factories smart factories and contribute to the improvement of their productivity.

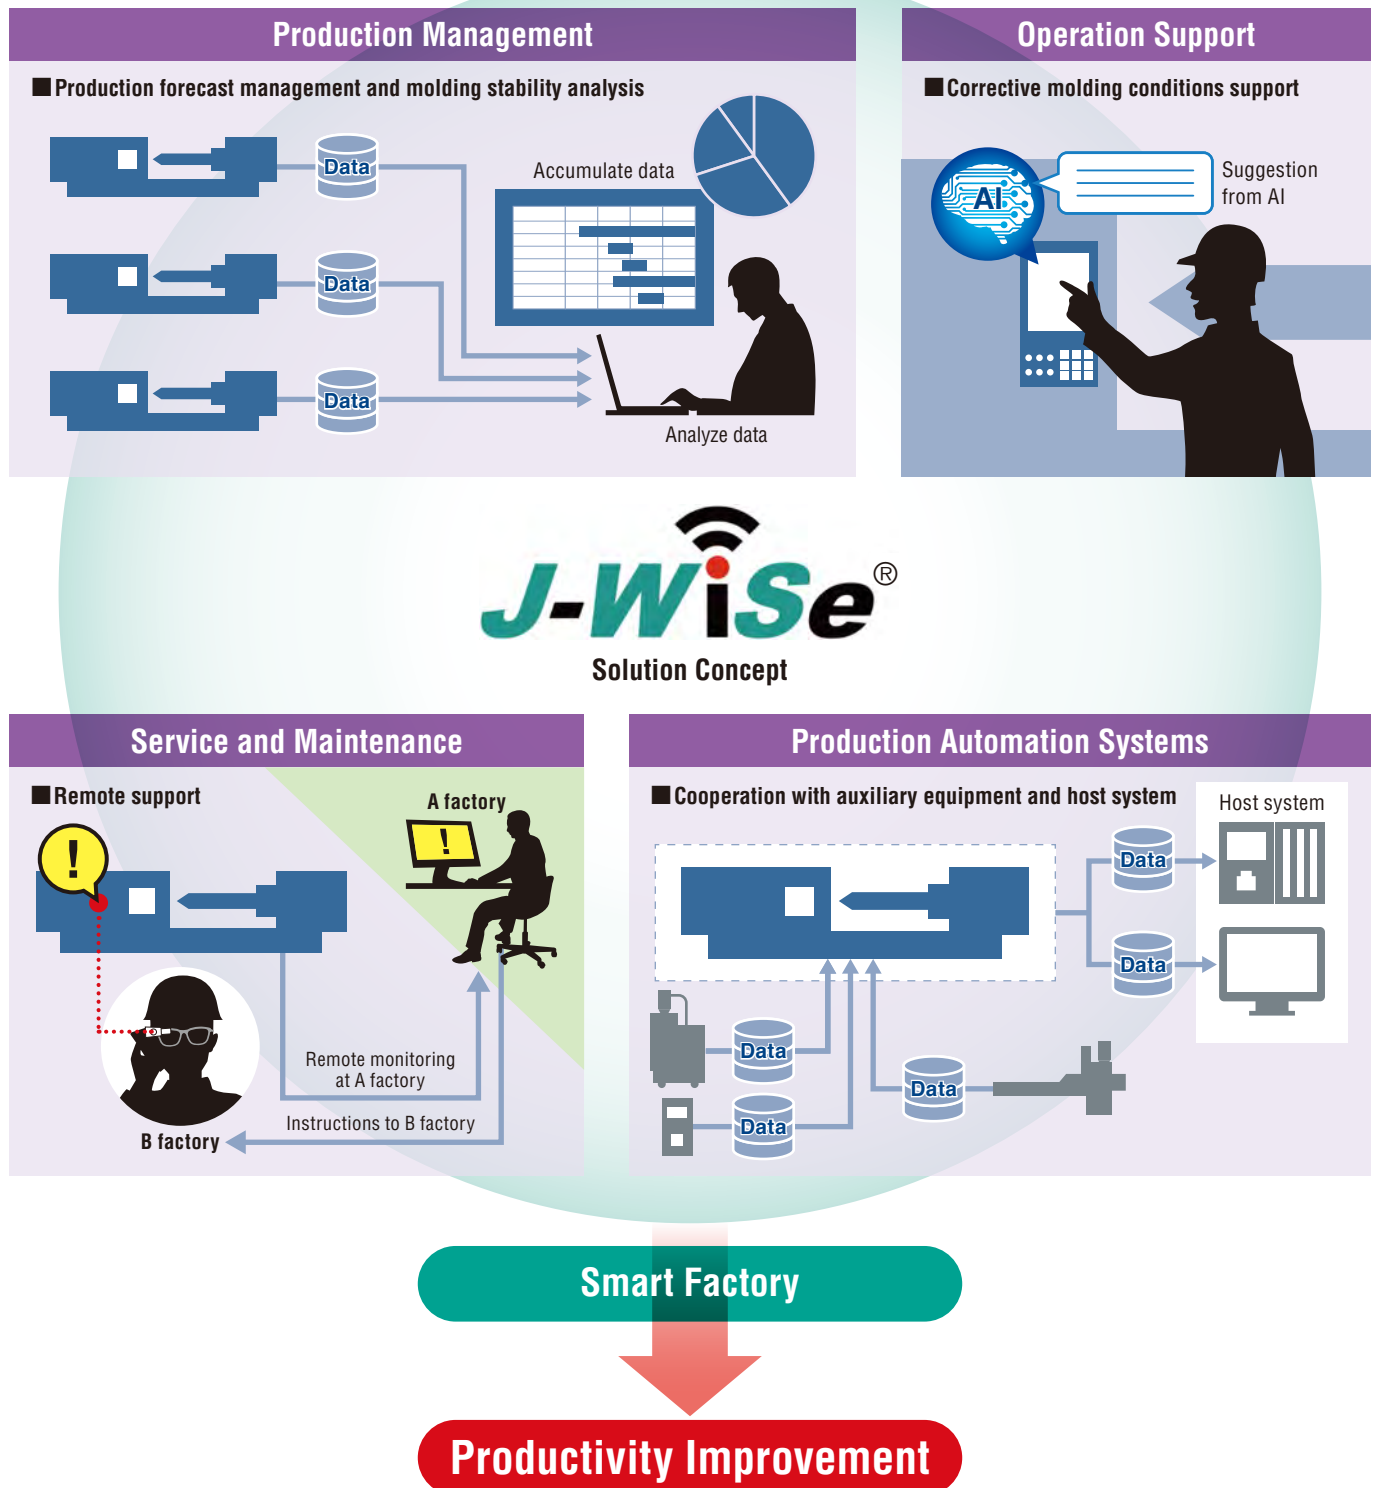

Various Equipment


A full range of equipment to meet a wide range of requirements.

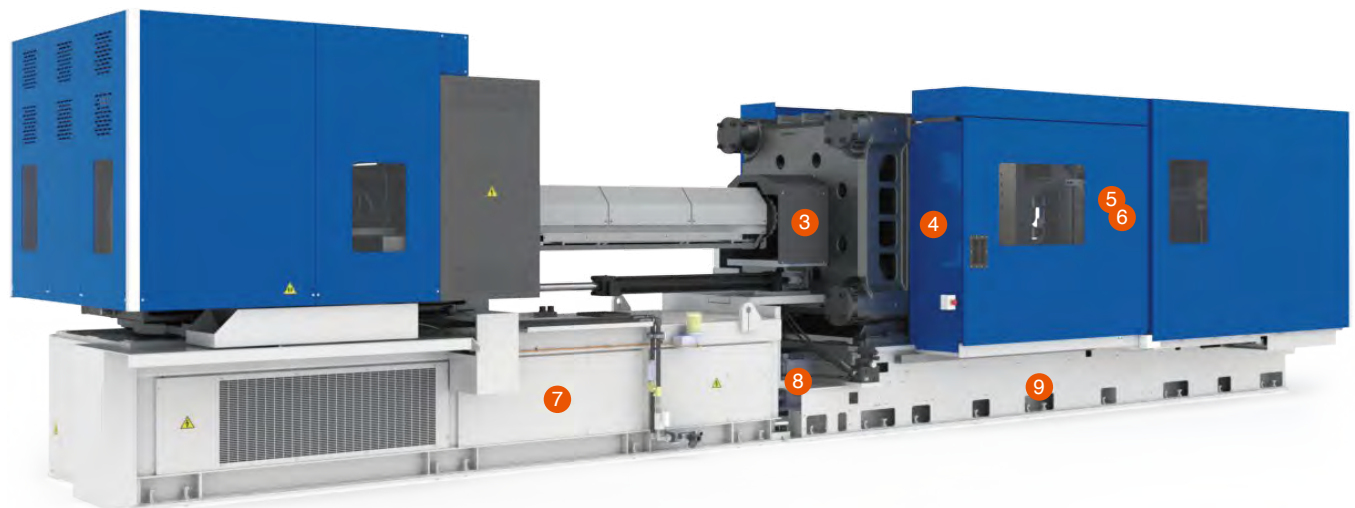

1 Leveling pad for installation



2 Safety mat

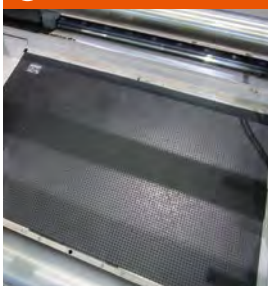

3 Valve unit



7 Spare receptacle



8 Hydraulic unit




4 Air jet



5 Hydraulic core-puller



6 Mold cooling water closed circuit on platen

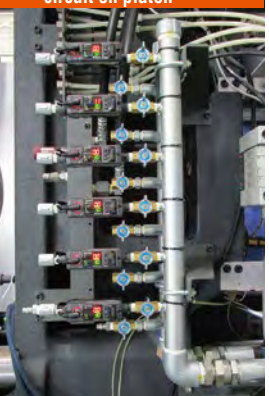

9 Mold cooling water closed circuit on bed




*These are sample pictures of options and may differ from the pictures depending on the customer's specifications.


Customization

Flexibly respond to custom specifications.


L-shape injection unit for two color molding

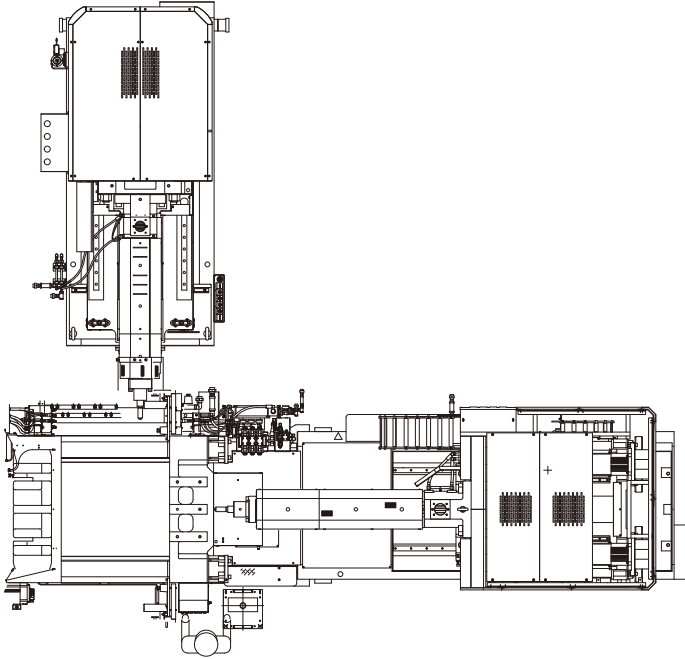

Retrofit sub-injection unit “FLiP[®]” for two color molding

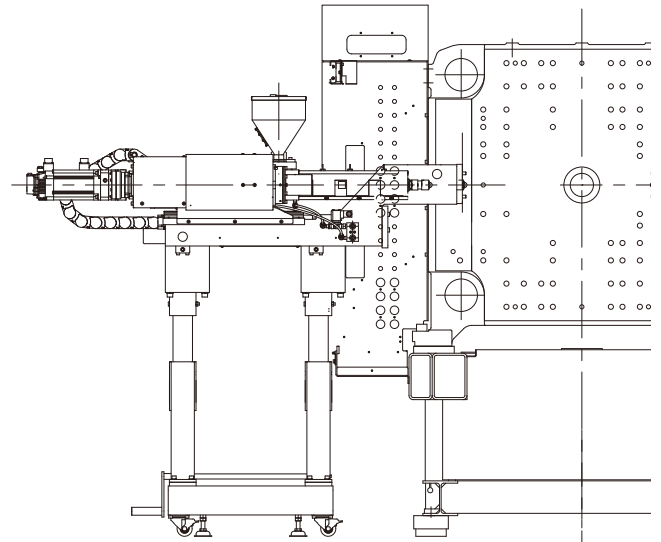

Slide type twin injection unit to reduce setup time significantly

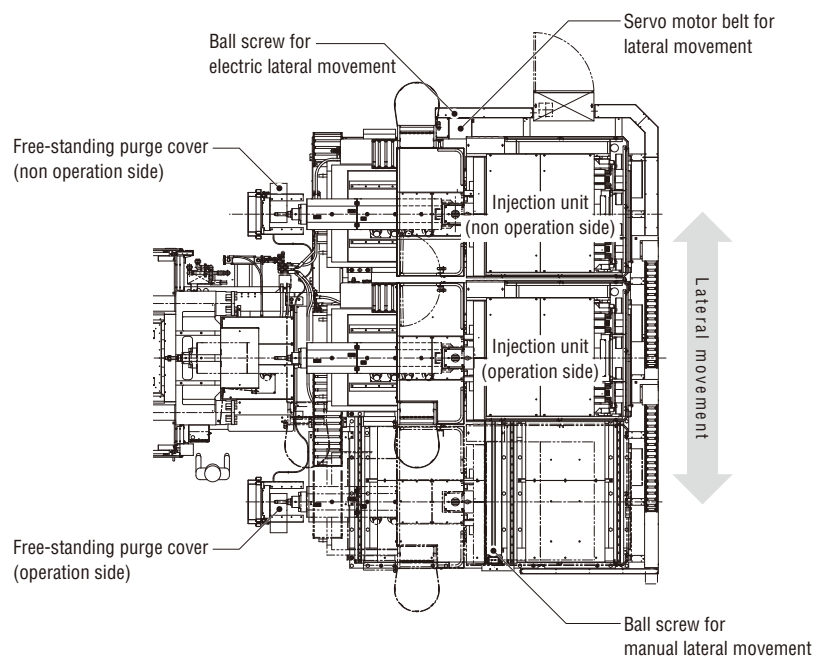

Standard Equipment List

Item		
Injection and Plasticizing Unit	Open nozzle	Note 1
	N2000F barrel	
	Chrome plated screw	Note 2
	Screw pull-back	
	Purge cover (with limit switch)	
	Injection Unit Swiveling device (with limit switch)	Note 3
	Screw cold start prevention	
	Molding/Purging/Pause temperature select	
	Auto purging circuit	
	Nozzle retract select	
	Injection/Metering programmed control	Injection/Holding pressure: 1~6 steps (variable) Metering/Back pressure: 1~3 steps (variable)
	Holding pressure transfer select	
	Holding pressure control select	
	Pull-back select	
	Barrel temperature control (PID/SSR)	
	Nozzle temperature control (PID/SSR)	
	Synchronous temperature rise control	
	Hopper flange temperature control	
	Soft pack servo control	
	HAVC (high accuracy volume control)	
	IWCS (injection and cushion stability) control	
	Reverse seal control	
	Auto grease lubrication	
Clamping Unit	High performance platen support	
	Low vibration mold open/close	
	Wide platen	
	Flat press platen mechanism (stationary side/movable side)	
	Mold open/close and Ejector programmed control	Mold open/close: 4 steps (fixed) Ejector: 1~3 steps (variable)
	Mold protection function	
	Ejector servo motor with brake	
	Mold open/close servo motor with brake	
	Auto mold thickness adjusting device	
	Auto clamp force setting	
	Clamp force display	
	Clamping force feedback control	
	Ejector plate return confirmation circuit	
	Electrical clamping unit safety device	
	Robot mounting holes	
	Compound action	Screw rotation during mold open/close Eject during mold open Injection during clamp up
	Safety mat (under mold area) J850ADSW and above	Note 4
	Grease free toggle bushing	
	Auto grease lubrication	

Item		
Controller	Touch panel 15" TFT color LCD controller	
	300 mold condition storage (internal memory)	Note 5
	Soft start molding	
	Self diagnostics function	
	I/O customize function	
	Molding operation assist [J-Assist]	
	Help function	
	Pop up display	
	Manual browsing function	
	Start up safety notice	
	Molding condition memo	
	Clock function	
	Multi language select (English, Chinese, Japanese)	
	USB port × 2	Note 6
	Overall setting screen	
	Preheat timer	
	Product takeout robot circuit	
	Attended/Unattended operation select	
	Emergency stop button	
	Safety key	
Monitor	Actual value display	
	Mold temperature display	Note 7
	Injection/Metering waveform monitor	
	Oscilloscope waveform monitor	
	Energy consumption and regeneration monitor	
	Injection/Metering waveform storage	
	Barrel temperature monitor	
	Injection pressure monitor (IPM)	
	Statistical graph	
	Production monitor	
	Cumulative operating hour display	
	Cycle monitor	
	Molding condition upper/lower limit monitor	Note 8
	Inspection and maintenance guide [J-Support]	Note 9
	Heater system alarm	
	Injection pressure overshoot alarm	
	Grease lubrication alarm	
	Servo fault alarm	
	Unreleased clamp alarm	
	Position calibration request	
Others	Fault alarm buzz	
	Alarm history	
	Set value history	
	Safety compliance (ISO20430, ISO60204-1)	
	Cooling water closed circuit for feed throat	
	Accessories (maintenance tools and ejector rods, etc.)	

Note 1 1400H and below are chip types.

Note 2 2300H and above are MIII-CL screws.

1400H and below are GP-21 screws.

Note 3 1400H and below are manual.

Note 4 J850ADSW and above are standard equipment. (models with tie-bar spacing larger than 1200 mm)

J550ADS to J850ADS are optional. (tie-bar interval smaller than 1200 mm)

The safety mat on the top of the steps is optional.

Note 5 Commercial USB flash drives can also store molding conditions.

Note 6 You can save the controller screen in PNG format and measured values in CSV format.

Note 7 Temperature sensor and wiring not included.

Note 8 You can select up to 18 display items and alarms from the list below.

(1) Cycle time (2) Injection time (3) Metering time (4) Maximum injection pressure (5) Cushion position (6) Holding pressure end position

(7) Holding pressure transfer pressure (8) Back pressure (9) Metering end position (10) Injection start position (11) Holding pressure transfer position

(12) Metering torque (13) Holding pressure transfer speed (14) Mold close time (15) Mold open time (16) Clamp force (17) Shift amount (HAVC) (18) End speed (HAVC)

Note 9 Notifies you of component inspection times based on molding conditions

Options List

Item	
Injection and Plasticizing Unit	Long nozzle
	Shut off nozzle (pneumatic type and hydraulic type)
	Mixing nozzle
	KC nozzle (support up to 3100H φ 92)
	LSP-2 screw (abrasion resistant type)
	Special design screw
	MIIK screw for optical application
	HP screw for high dispersion
	Wide selection of screws & barrels
	Note 1
	Barrel insulation cover
	Barrel blower cooling unit (with insulation or no insulation)
	Hopper
	Hopper slide device
	High speed injection spec.
Clamping Unit	Extended holding pressure time spec.
	Note 2
	Long time plasticizing spec.
	Note 3
	Electric motor driven injection unit advance/retract
	Purge shutter
	Daylight extension
	Mold platen heat insulation board (5 or 10 mm)
	Note 4
	Locating ring
	Air jet
	Core pull devices (pneumatic type and hydraulic type)
	Note 5
	Valve gate devices (pneumatic type and hydraulic type)
	Note 5
	Coupler joint (hydraulic, pneumatic)
	Hydraulic power pack
	Ejector gate cutting circuit
	Ejector (one touch type)
	Unscrewing motor circuit
	Auto safety gate open (operation side)
	Auto safety gate open/close (operation side/non operation side/both sides)
	Safety mat (under mold area) J550ADS to J850ADS
	Note 6
	Safety mat (top of the steps)
	Safety footplate
	T slot platen
	Mold clamper device (pneumatic, hydraulic, magnet type)
	Note 4
	Easy mold clamper
	Toggle type injection compression function compression:
	1~6 steps (variable)
	A mode
	B mode
	Forming mold control
	Mechanical clamping unit safety device

Item	
Electrical Instrumentation and Control	Multi language select (1 language additional)
	Note 7
	J-WiSe®system
	Mold temp display (with mold temp upper/lower limit alarm)
	Mold temp control device (with mold temp upper/lower limit alarm)
	Hot runner control circuit
	Receptacle
	Note 8
	Family mold control
	Flow mold control
Others	Spee output signal circuit
	Motion/no-motion select
	Hopper stage
	Mold cooling water closed circuit (platen/bed)
	Cooling water failure warning
	Air pressure alarm
	Leveling pad for installation
	Movement prevent anchor bolts
	Rotary warning light
	Export specification
	Note 9
	Designated color
	Note 10

Note 1 Please contact us for detailed specifications.

Note 2 High pressure holding capacity for a long time.
Injection speed may be slow.

Note 3 Can be plasticized with high torque.
Plasticizing capacity may be reduced.

Note 4 When an insulated plate or magnetic clamper is mounted, the nozzle plunge amount must take these thicknesses into account.
Specification values for mold thicknesses have also been changed.

Note 5 The hydraulic system requires an increase in the capacity of the hydraulic unit.


Note 6 J850ADSW and above are standard equipment. (models with tie-bar spacing larger than 1200 mm)
J550ADS to J850ADS are optional. (tie-bar interval smaller than 1200 mm)

Note 7 Japanese, English and Chinese are standard equipment.

Note 8 Please specify the power supply voltage and the number of outlets required for ancillary equipment.

Note 9 Export specifications must be discussed depending on the destination.

Note 10 Designate colors, referring to color samples or muncell codes.

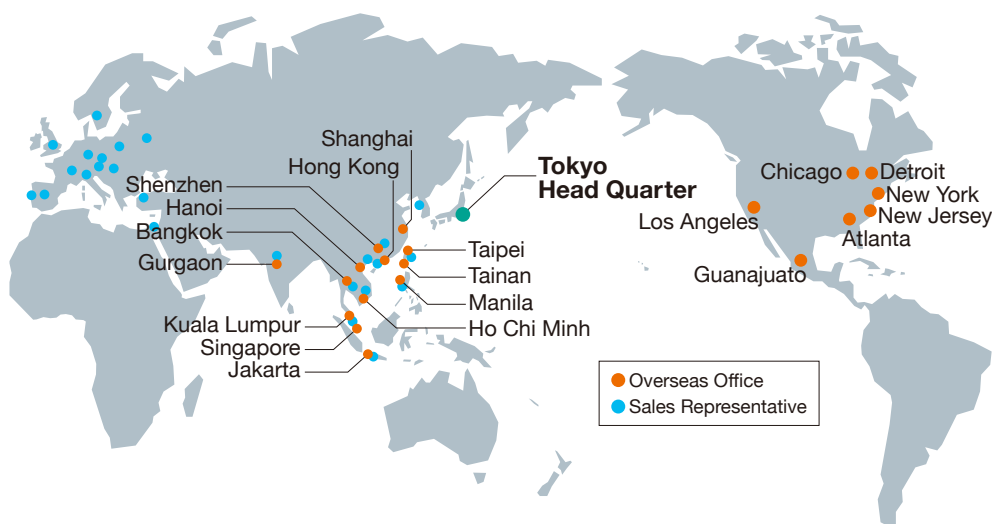

JSW THE JAPAN STEEL WORKS, LTD.

<https://www.jsw.co.jp/en/>

Division Gate City Ohsaki-West Tower, 11-1, Osaki 1-chome, Shinagawa-ku, Tokyo 141-0032, Japan
Head Quarter: Phone: +81-3-5745-2081 URL https://www.jsw.co.jp/en/products/injection_molding/

Japan Steel Works America, Inc.

Head Office: 1251 Avenue of the Americas, Suite 2390, New York, NY 10020, U.S.A.
Phone: +1-212-490-2630

New Jersey

Technical Center: 1881 US-46, Ledgewood, NJ 07852, U.S.A.
Phone: +1-732-285-1952

Los Angeles Office: 1890 S Carlos Avenue, Building 15, Unit 6, Ontario, CA 91761
Phone: +1-909-740-3808

Chicago Office: 201 Hansen Court, Suite 121, Wood Dale, IL 60191, U.S.A.
Phone: +1-630-716-3400

Detroit Office: 24387 Halsted Road Unit B, Farmington Hills, Michigan 48335, U.S.A.
Phone: +1-248-536-0288

Atlanta Office: 1395 S. Marietta Pkwy., Bldg. 200, Suite 201, Marietta, Georgia 30067, U.S.A.
Phone: +1-770-575-0383

The Japan Steel Works (Singapore) Pte. Ltd.

17 Gul Lane 629413, Singapore
Phone: +65-6861-4511

PT. JSW Plastics Machinery Indonesia

Gajah Building Unit AP, Jl.Dr.Saharjo No.111 Tebet,
Jakarta Selatan 12810, Indonesia
Phone: +62-21-8370-2536

JSW Plastics Machinery (Philippines) Inc.

Unit 2205, 22nd Floor, Asian Star Building, Asean Drive,
Filiinvest Corporate City, Alabang, Muntinlupa City, 1781, Philippines
Phone: +63-2-8478-2533

JSW Plastics Machinery (M) SDN. BHD.

D12-3A, Pusat Perdagangan Dana 1, Jalan PJU 1A/46, 47301,
Petaling Jaya, Selangor, Malaysia
Phone: +60-3-7842-6076

The Japan Steel Works (Thailand) Co., Ltd.

78/6 JST Building 4th Floor, Moo 7 King Kaew Road, Rachatewa, Bangplee,
Samutprakarn 10540, Thailand
Phone: +66-2-738-5272

JSW Plastics Machinery Vietnam Ltd.

Hanoi Head Office: Room103, Techno-Center Thang Long Industrial Park, Kim Chung Commune,
Dong Anh District, Hanoi, Vietnam
Phone: +84-24-3951-6383

Ho Chi Minh Office: Ground Floor, DC Tower, 111D Ly Chinh Thang, Ward 7, District 3, HCC, Vietnam
Phone: +84-28-3526-1295

JSW Plastics Machinery (H.K.) Co., Ltd.

Room 907, Corporation Park, 11 On Lai Street, Shatin N.T., Hong Kong
Phone: +852-2648-0720

JSW Plastics Machinery (Shenzhen) Co., Ltd.

No.101A, 1st Floor, Building 6, Nangang 2nd Industrial Park, No.1026 Songbai Road,
Xili, Nanshan, District, Shenzhen, Guangdong, 518055, China
Phone: +86-755-8602-0930

JSW Machinery Trading (Shanghai) Co., Ltd.

301-304 Metro Plaza, No.555 Loushanguan Road, Changning District,
Shanghai 200051, China
Phone: +86-21-5206-7031

JSW Plastics Machinery (TAIWAN) Corp.

Head Office: 1F, No.21, Dahu 1st Road, Gueishan Dist., Taoyuan City, 33373 Taiwan, R.O.C.
Phone: +886-3-396-2102

Tainan Office: 15F-7, No.689-78, Xiaodong Road, Yongkang Dist., Tainan City, 71052, Taiwan, R.O.C.
Phone: +886-6-311-4192

Japan Steel Works India Private Limited

611, Time Tower, MG Road, Sector 28, Gurgaon, Haryana, 122001, India
Phone: +91-124-469-4444

JSW Plastics Machinery Mexico S. de R.L. de C.V.

Avenida Mineral de Valenciana 202 A-1, Parque Industrial Santa Fe,
Silao De La Victoria, Guanajuato C.P. 36275, Mexico
Phone: +52-472-748-9412